


# UHF

## CTU07601-465




### GENERAL SPECIFICATION


<b>Applications</b>	Apparel
<b>IC</b>	Impinj R6
<b>Frequency</b>	Global 860-960 MHz
<b>Protocol</b>	ISO18000-63 EPC 2v2 compliant
<b>User memory</b>	/
<b>EPC memory</b>	96 Bits
<b>Antenna size</b>	72.3x13.3 mm
<b>Tag size</b>	78x22 mm
<b>Pitch</b>	25.4 ± 0.5mm
<b>Core inner diameter</b>	76 ± 0.5mm
<b>Storage Temperature</b>	20~30 °C / 20%~60% RH
<b>Operating Temperature</b>	-40~85 °C / 20%~60% RH
<b>Standard roll qty</b>	5000 - 20000pcs
<b>Antenna Process Mode</b>	Aluminum Etching

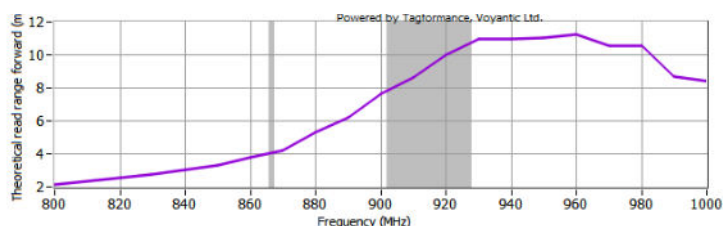

Read Range

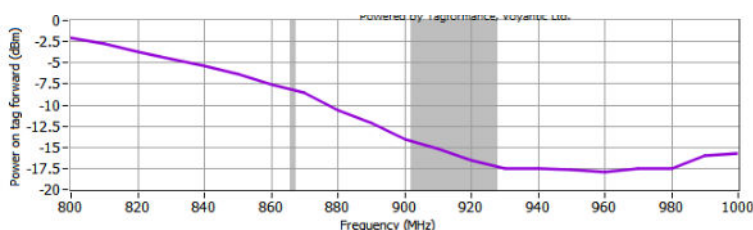

Sensitivity Results from Free Space(dBm)

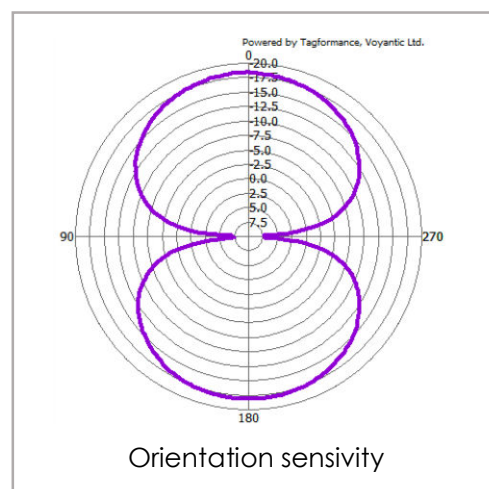

Orientation sensitivity

