

# Hammer M700

## Overview

### Chip

M730

### EPC

128bits

### USER

Null

### Antenna Dimensions

70\*14mm

### Frequency Band

860MHz-960MHz

### International Standard

EPCglobal C1 Gen2 and ISO18000-6C

### Industry Segments



Apparel and Logistic

### Applications

Inventory Management



Hammer M700 uses Impinj M730 chip. The standard size of 70\*14mm makes the tag have good performance in the full frequency band (860-960 MHz). The special antenna design concept makes it a leading position among similar tags in the market. It is suitable for all kinds of RFID tag applications, especially Clothing inventory management, logistics and other related fields.

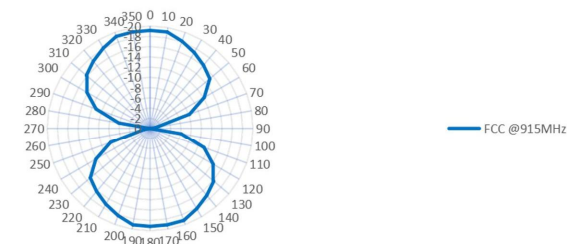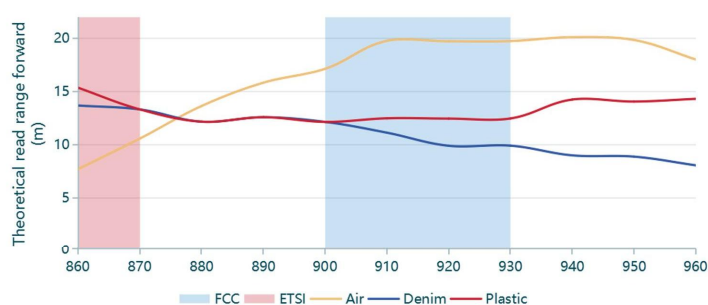

### Address

Building No. 6, Xindeco Industrial Park, No. 2-16 Hongxi South Road, Xiang'an District, Xiamen, 361101, China

Lot 28, Jalan Permata 1/1, Arab Malaysia Industrial Park, 71800 Nilai, Negeri Sembilan

### Contact

Email sales@xindecoiot.com

Web www.xindecoiot.com



# Technical features

	Dry	Wet	Paper-face
Product Code	CTU45201-483	CTU45201-483W	CTU45201-483L
Antenna Size	70*14mm 2.76*0.55in	70*14mm 2.76*0.55in	70*14mm 2.76*0.55in
Finish Size	- -	73*17mm 2.87*0.67in	73*17mm 2.87*0.67in
Web Width	85mm 3.346in	79mm 3.11in	79mm 3.11in
Pitch	22.225mm 0.875in	22.225mm 0.875in	22.225mm 0.875in
Antenna Material	Aluminium	Aluminium	Aluminium
Front Face	-	PET Clear/PET White/Paper	Paper
Inlay Substrate	PET Clear/PET White/Paper	PET Clear/PET White/Paper	PET Clear/Paper
Inlay Adhesive	-	Permanent	Permanent
Liner	-	Paper	Paper
Operating Temperature	-20°C/50°C   -4°F/+122°F	-20°C/50°C   -4°F/+122°F	-20°C/50°C   -4°F/+122°F
Shelf Life Time	@20% to 80% RH 2/2/1 years @+25°C/40%RH	@20% to 80% RH 1 years @+25°C/40%RH	@20% to 80% RH 1 years @+25°C/40%RH
Final Inspection	100% tested	100% tested	100% tested